





شرکت آسان راه البرز

با 40 سال تجربه در زمینه ی واردات ماشین آلات معدنی، راهسازی و صنعتی و با استفاده از مدیران خبره، کارشناسان مجرب و پرسنل با تجربه آموزش دیده از فعالترین شرکت های تجاری در ایران می باشد. این شرکت در سال 1389 موفق به اخذ نمایندگی رسمی از شرکت هیوندای کره جنوبی و نمایندگی انحصاری محصولات اوردایم برای واردات، فروش و خدمات پس از فروش ماشین آلات سنگین، راهسازی، معدنی و صنعتی در ایران گردید.

این شرکت با توجه به نیاز مشتریان و محیط های کاری موجود اقدام به واردات انواع ماشین آلات راهسازی از قبیل لودر چرخ لاستیکی، بیل هیدرولیکی چرخ لاستیکی و چرخ زنجیری و انواع لیفتراک با بازه تناژی بالا و انواع چکش های هیدرولیکی و انواع ژنراتورهای برق (دیزلی و دوگانه سوز) نموده است و هر دوره با توجه به درخواستها بر تنوع محصولات خود اضافه میکند.

Dimension

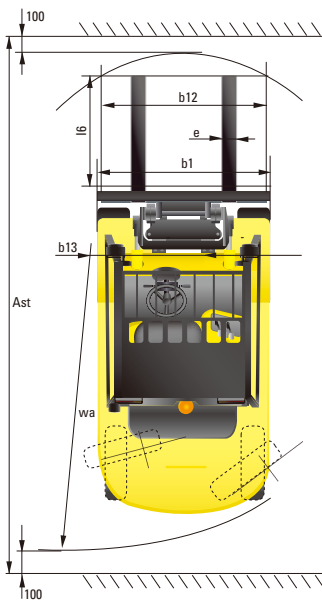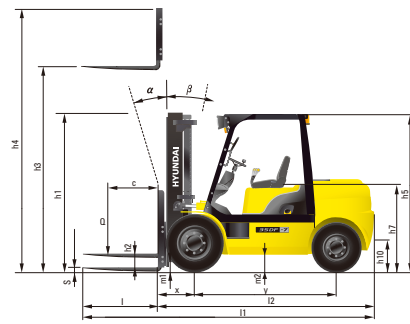

Specification

Identification					
1.1	Manufacturer	Hyundai	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation	20DF-7	25DF-7	30DF-7	35DF-7
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas, manual	DIESEL	DIESEL	DIESEL	DIESEL
1.4	Type of operation: hand, pedestrian, standing, seated, order-picker	seated	seated	seated	seated
1.5	Load capacity / rated load	kg 2,000	kg 2,500	kg 3,000	kg 3,300
1.6	Load center distance	c mm 500	c mm 500	c mm 500	c mm 500
1.8	Load distance, center of drive axle to fork	x mm 468	x mm 468	x mm 468	x mm 480
1.9	Wheelbase	y mm 1,650	y mm 1,650	y mm 1,700	y mm 1,700
Weights					
2.1	Service weight	kg 3,380	kg 3,693	kg 4,149	kg 4,443
2.2	Axle loading, loaded front/rear	kg 4,704 / 675	kg 5,432 / 761	kg 6,281 / 868	kg 6,792 / 951
2.3	Axle loading, unloaded front/rear	kg 1,531 / 1,849	kg 1,465 / 2,228	kg 1,572 / 2,577	kg 1,613 / 2,830
Wheels, Chassis					
3.1	Tires: solid rubber, superelastic, pneumatic, polyurethane	pneumatic	pneumatic	pneumatic	pneumatic
3.2	Tires size, front	7.00-12-12PR	7.00-12-12PR	8.15-15-14PR	8.15-15-14PR
3.3	Tires size, rear	6.50-10-12PR	6.50-10-12PR	6.50-10-12PR	6.50-10-12PR
3.5	Wheels, number front x rear (x=driven wheels)	x2 / 2	x2 / 2	x2 / 2	x2 / 2
3.6	Track width, front	mm 965	mm 965	mm 1,005	mm 1,005
3.7	Track width, rear	mm 980	mm 980	mm 980	mm 980
Basic Dimensions					
4.1	Mast / fork carriage tilt forward / backward (α/β)	degrees 6 / 10	degrees 6 / 10	degrees 6 / 10	degrees 6 / 10
4.2	Lowered mast height	h1 (mm) 2,025	h1 (mm) 2,025	h1 (mm) 2,040	h1 (mm) 2,190
4.3	Free lift	h2 (mm) 155	h2 (mm) 155	h2 (mm) 155	h2 (mm) 155
4.4	Lift height	h3 (mm) 3,000	h3 (mm) 3,000	h3 (mm) 3,000	h3 (mm) 3,200
4.5	Extended mast height	h4 (mm) 4,185	h4 (mm) 4,185	h4 (mm) 4,185	h4 (mm) 4,385
4.7	Overhead load guard (cab) height	h5 (mm) 2,160	h5 (mm) 2,160	h5 (mm) 2,180	h5 (mm) 2,180
4.8	Seat height / standing height	h7 (mm) 1,110	h7 (mm) 1,110	h7 (mm) 1,130	h7 (mm) 1,130
4.12	Coupling height	h10 (mm) 283	h10 (mm) 283	h10 (mm) 299	h10 (mm) 299
4.19	Overall length	l1 (mm) 3,597	l1 (mm) 3,657	l1 (mm) 3,742	l1 (mm) 3,782
4.20	Length to face of forks	l2 (mm) 2,547	l2 (mm) 2,607	l2 (mm) 2,692	l2 (mm) 2,732
4.21	Overall width	b1 (mm) 1,160	b1 (mm) 1,160	b1 (mm) 1,230	b1 (mm) 1,230
4.22	Fork dimensions (hook type)	s / e / l (mm) 1,050x100x45	s / e / l (mm) 1,050x100x45	s / e / l (mm) 1,050x122x45	s / e / l (mm) 1,050x122x45
4.23	Fork carriage ISO 2328, class / type A,B	II / A	II / A	III / A	III / A
4.24	Fork-carriage width	b12 (mm) 1,102	b12 (mm) 1,102	b12 (mm) 1,102	b12 (mm) 1,102
4.31	Ground clearance, loaded, under mast	m1 (mm) 130	m1 (mm) 130	m1 (mm) 145	m1 (mm) 145
4.32	Ground clearance, centre of wheelbase	m2 (mm) 171	m2 (mm) 171	m2 (mm) 189	m2 (mm) 189
4.33	Aisle width for pallets 1,000x1,200 crossways (LxW)	Ast1 (mm) 3,928	Ast1 (mm) 3,981	Ast1 (mm) 4,066	Ast1 (mm) 4,102
4.34	Aisle width for pallets 800x1,200 lengthways (WxL)	Ast2 (mm) 4,128	Ast2 (mm) 4,181	Ast2 (mm) 4,266	Ast2 (mm) 4,302
4.35	Turning radius	Wa (mm) 2,260	Wa (mm) 2,313	Wa (mm) 2,398	Wa (mm) 2,434
4.36	Smallest pivot point distance	b13 (mm) 714	b13 (mm) 714	b13 (mm) 731	b13 (mm) 731
Performance Data					
5.1	Travel speed, unloaded	km/h 17.6	km/h 17.6	km/h 18.5	km/h 18.5
5.2	Lift speed, loaded / unloaded	mm/s 570 / 590	mm/s 550 / 590	mm/s 460 / 480	mm/s 450 / 480
5.3	Lowering speed, loaded / unloaded	mm/s 500 / 450	mm/s 500 / 450	mm/s 500 / 450	mm/s 500 / 450
5.5	Drawbar pull, loaded	kg 2,257	kg 2,275	kg 2,161	kg 2,162
5.7	Gradient performance, loaded / unloaded	% 40.2 / 24.6	% 34.6 / 21.6	% 27.9 / 20.6	% 25.9 / 19.2
5.9	Acceleration time, loaded / unloaded (10m)	sec NA	sec NA	sec NA	sec NA
5.10	Service brake	FOOT	FOOT	FOOT	FOOT
Engine					
6.1	Engine manufacturer / type	HMC D4BB	HMC D4BB	HMC D4BB	HMC D4BB
6.2	Engine power acc. to ISO 1585	kW 39	kW 39	kW 39	kW 39
6.3	Rated speed	1/min 2,500	1/min 2,500	1/min 2,500	1/min 2,500
6.4	No. of cylinder / cubic capacity	anz/cm 4 / 2,604	anz/cm 4 / 2,604	anz/cm 4 / 2,604	anz/cm 4 / 2,604
6.5	Fuel consumption acc. To VDI cycle	l/h 2.0	l/h 2.2	l/h 2.5	l/h 2.6
Other Details					
8.1	Type of drive control	power shift	power shift	power shift	power shift
8.2	Operating pressure (system / attach)	bar/cm 200 / 165	bar/cm 200 / 165	bar/cm 200 / 165	bar/cm 200 / 165
8.3	Oil volume	l 30	l 30	l 30	l 30
8.4	Noise	db(A) 80	db(A) 80	db(A) 80	db(A) 80



■ The photograph and the actual equipment may differ in appearance.

HYUNDAI DIESEL FORKLIFT TRUCKS Environmentally - Friendly

20/25/30/33/35DF-7


■ Contact your Hyundai dealer for more information. The machine shown may vary according to International standards.

HYUNDAI FORKLIFT
HEAVY INDUSTRIES CO., LTD.

Head Office (Sales Office)
14th FL, HYUNDAI BLDG. 140-2, KYE-DONG, JONGNO-GU, SEOUL, KOREA 110-793
TEL (82) (2) 746-4526, 4529 FAX (82) (2) 746-7444-7445

Americas Operation : Hyundai Construction Equipment Americas, Inc.
6100 ATLANTIC BOULEVARD NORCROSS GA 30071 U.S.A TEL (1) 847-678-823-7802 FAX (1) 847-678-823-7778

Europe Operation : Hyundai Heavy Industries Europe N.V.
VOSSENDAAL 11, 2440 GEEL, BELGIUM TEL (32) 14-56-2200 FAX (32) 14-59-3405



PLEASE CONTACT

www.hyundai-ce.com

2013. 04 Rev.5

HYUNDAI
HEAVY INDUSTRIES CO., LTD.

We build a better future

20DF/25DF/30DF/33DF/35DF -7

New criterion of Forklift Trucks

Hyundai introduces a new line of 7series diesel forklift trucks.
Excellent power and performance makes your business more profitable.



■ The photograph and the actual equipment may differ in appearance.

High Power & Performance

Powerful Engine

HMC D4BB Engine (20/25/30/33DF-7) 39kW/2,500rpm



Market approved quality of HMC D4BB engine ensures incomparable performance, durability and additional value to the machine, 39kW of the engine is more than enough to suit any work, not just with normal 39kW but with special attachments requiring high power as well (Eu stage III A certified)


KUBOTA V3600 Engine (35DF-7) 48kW/2,300rpm



Market approved quality of Kubota V3600 engine ensures incomparable performance, durability and additional value to the machine. 48kW of the engine is more than enough to suit any work, not just with normal 48kW but with special attachments requiring high power as well. (EPA/EU Tier-3 Certified)

State-of-the-art hydraulic system

The latest large-capacity hydraulic system reacts quickly during operation, and a low-noise control valve increases both efficiency and durability.

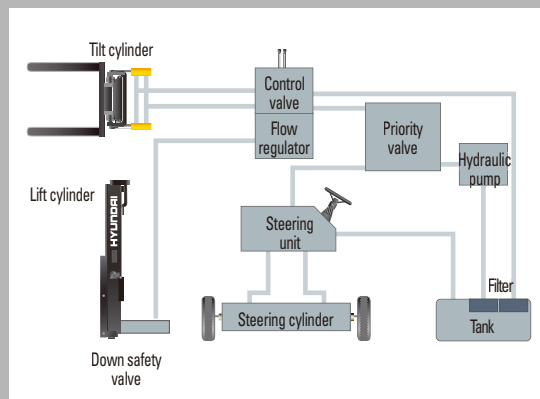

The new master on the job-site!

Smooth running, efficient and ergonomically designed, 20/25/30/33/35DF-7 series are made to meet your needs.

■ The photograph and the actual equipment may differ in appearance.



Fast and stable performance

Being able to quickly raise and lower the mast, as well as tilt it forward and backward, provides the best operational conditions during unloading. When the truck is fully loaded, mast lowering speed is carefully controlled to ensure safety by the down control valve.

Faster travel speed & gradeability

The powerful high-output engine provides greater acceleration, better gradeability and faster travel speed on any tough terrain or slope.



Increased mast tilting angle

Utilizing the standard mast tilting angle of 6 degrees forward and 10 degrees backward, the operator can safely and rapidly perform loading and unloading jobs.




Wet disc brake system

The wet disc brake system is virtually maintenance free and is enclosed to protect from dust and water.



Fully hydrostatic power steering

A hydraulic steering system always guarantees smooth and flexible steering, preventing overrun and kick-back.

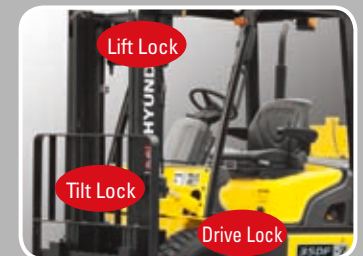

OPSS (Operator Presence Sensing System)

Control of mast tilting, lifting and lowering is not possible through operation of the appropriate control when the operator is not in the normal position.(Option)

Comfortable Operation



Adjustable steering wheel

Steering wheel with horn button can be adjusted by a lever on the right-hand side for the most comfortable operator position.



Easy and safe shift lever

A single lever on the left side of the steering column gives the operator fast, easy control of direction.



Multi-function switch lever

Multi-functional switch lever gives easy access to lights and horn.



Quick response of operating control levers

Only minimal operator's effort is required for precise, safe and productive control.



■ The photograph and the actual equipment may differ in appearance.

Ergonomically designed with the operator in mind!

A design based on human engineering relieves fatigue and increase operator's efficiency.



Ergonomically positioned pedals

Based on human engineering, the accelerator, brake and inching pedals are optimally positioned for convenience while operating the equipment.



Cup holder & console box


Additional storage spaces are located inside the operating space for operator's convenience.



New high visibility for safe operation

The operator is able to work with increased safety and accuracy due to a wider view mast.


Operator friendly gauges and water-resistant monitor panel

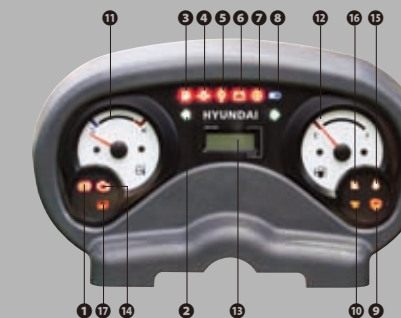

- | | |
|---|---------------------------|
| ① Parking brake lamp | ⑤ Water separator lamp |
| ② Directional indicators | ⑩ Pre-heater indicator |
| ③ Fuel warning lamp | ⑪ Water temperature gauge |
| ④ Engine oil warning lamp | ⑫ Fuel gauge |
| ⑥ Transmission oil temperature warning lamp | ⑬ Hour meter |
| ⑦ Battery charging warning lamp | ⑭ Engine check lamp |
| ⑧ Air cleaner filter warning light | ⑮ Seat belt warning |
| ⑨ Working light indicator | ⑯ OPSS warning(Optional) |
| | ⑰ Brake oil level lamp |

Grammer Seat (Option)

- Quick Achievement of the Ergonomically Best Sitting Position
- Asymmetrical Backrest
- Movable Armrests
- Seat Heating
- Practical Document Box

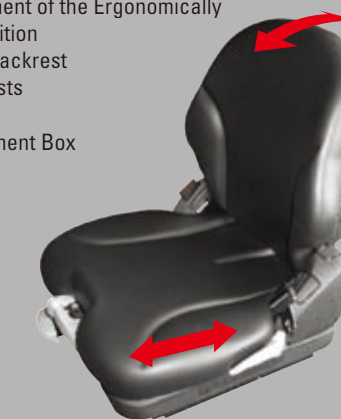

Full floating overhead guard mount

The anti-vibration rubber is installed between the guard and truck frame to reduce the source of vibration and noise while driving. This not only reduces operator's fatigue but also increases safety.



Endurance & Safety

Strong overhead guard

The safety overhead guard exceeds EEC and ANSI regulations and protects the operator during hazardous jobs.



Parking brake

Ratchet type parking brake requires less efforts from the operator to set.



Highly durable split type drive axle

The bevel gear set and hub reduction axle smoothly delivers desired torque to the drive wheels.



Enhanced safety through high durability!


Safety and durability are priorities in the design of the equipment.

■ The photograph and the actual equipment may differ in appearance.



Large footboard & hand grip

Wide "open" step offers convenience and safety when entering and exiting truck.

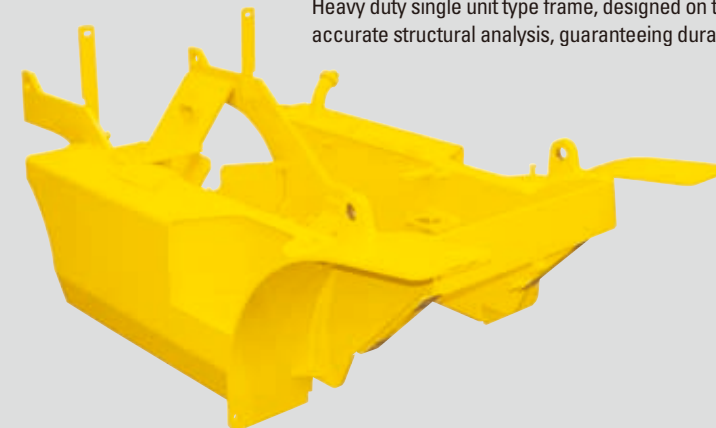

Heavy duty single unit frame

Heavy duty single unit frame, designed on the basis of accurate structural analysis, guaranteeing durability and safety.




Easy access of electrical Components

Various electric parts are centralized in dash board resulting in improvement in maintenance



Bright, protected headlights

Bright, protected headlights is positioned for exceptional visibility.



Ground clearance

The engine and transmission are assembled horizontally and positioned high in the frame to protect expansive components during operation on rugged surface.



Electrically monitored air filter

Air cleaner sensor alerts the operator of a restricted air filter and allows replacement before damage.



Brake fluid reservoir with level switch

When brake oil level become lower than Min. the warning lamp on the cluster lights on.



An accessible, compact fuse box for easy inspection

Centralized design for easy service!

An ideal arrangement of component parts ensures easy access and convenience for maintenance.



■ The photograph and the actual equipment may differ in appearance.




Easy change air cleaner

The air filter is readily accessible for cleaning or replacement. (7inch Cyclone Type)



Tool-less floor plate for serviceability.

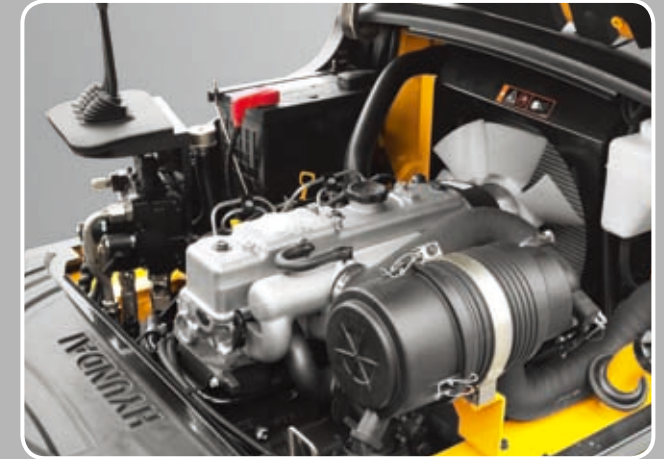

Large open engine hood

Highly accessible engine compartment assures fast and efficient maintenance.



Hydraulic oil check




Automatic self locking gas spring

Engine compartment hood is held safely open by a self locking gas spring.



Portable side cover



Aluminum radiator with superb protection against heat



Engine oil condition check

Specification


Mast Specification (20DF/25DF/30DF-7)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height				Tilt Angle		Load capacity w / o side shift at 500 mm LC				Load capacity w / side shift at 500 mm LC				Truck Weight Unload											
			With bkr (mm)		With / o bkr (mm)		Fwd	Bwd	Single Tire (kg)		Double Tire (kg)		Single Tire (kg)		Double Tire (kg)		Single Tire (kg)		Double Tire (kg)									
			20/25/30DF-7	20/25DF-7	30DF-7	20/25DF-7			30DF-7	20DF-7	25DF-7	30DF-7	20DF-7	25DF-7	30DF-7	20DF-7	25DF-7	30DF-7	20DF-7	25DF-7	30DF-7							
2-Stage limited free lift	*V300	3,000	2,025	2,040	155	155	155	155	6	10	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	3,410	3,723	4,179	3,546	3,859	4,266			
	V330	3,300	2,175	2,190	155	155	155	155	6	10	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	3,430	3,743	4,199	3,566	3,879	4,286			
	V350	3,500	2,275	2,290	155	155	155	155	6	10	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	3,447	3,760	4,217	3,583	3,896	4,304			
	V370	3,700	2,425	2,440	155	155	155	155	6	10	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,425	3,000	2,000	2,500	3,000	3,469	3,782	4,240	3,605	3,918	4,326
	V400	4,000	2,575	2,590	155	155	155	155	6	10	2,000	2,460	3,000	2,000	2,500	3,000	2,000	2,385	2,880	2,000	2,425	2,920	3,499	3,812	4,271	3,635	3,948	4,357
	V430	4,300	2,725	2,740	155	155	155	155	6	6	2,000	2,410	2,900	2,000	2,470	2,950	1,925	2,335	2,800	2,000	2,385	2,850	3,350	3,863	4,323	3,687	4,000	4,410
	V450	4,500	2,875	2,890	155	155	155	155	6	6	1,970	2,350	2,850	2,000	2,430	2,920	1,885	2,275	2,750	2,000	2,355	2,820	3,372	3,885	4,346	3,709	4,022	4,433
	V470	4,700	2,975	2,990	155	155	155	155	6	6	1,940	2,320	2,800	2,000	2,410	2,880	1,865	2,245	2,700	1,925	2,335	2,780	3,387	3,900	4,361	3,723	4,036	4,448
	V500	5,000	3,125	3,140	155	155	155	155	6	6	1,900	2,260	2,750	1,940	2,350	2,820	1,825	2,185	2,650	1,865	2,275	2,720	3,399	3,922	4,384	3,745	4,058	4,471
	V520	5,200	3,200	3,215	155	155	155	155	6	6	1,860	2,200	2,700	1,900	2,300	2,760	1,785	2,145	2,610	1,825	2,235	2,680	3,409	3,932	4,394	3,766	4,079	4,482
2-Stage full free lift	VF290	2,900	2,025	2,040	845	860	1,377	1,314	6	6	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	3,456	3,769	4,219	3,593	3,906	4,306
	VF320	3,200	2,175	2,190	955	1,010	1,527	1,464	6	6	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	2,000	2,500	3,000	3,489	3,802	4,254	3,626	3,939	4,341
	TF370/TS370	3,700	1,825	1,840	645	660	1,177	1,114	6	6	2,000	2,450	3,000	2,000	2,500	3,000	2,000	2,375	2,860	2,000	2,425	2,880	3,346	3,659	4,129	3,683	3,996	4,415
	TF400/TS400	4,000	1,925	1,940	745	760	1,277	1,214	6	6	2,000	2,400	2,880	2,000	2,470	2,950	1,925	2,325	2,780	2,000	2,385	2,850	3,370	3,683	4,153	3,707	4,020	4,439
	TF430/TS430	4,300	2,025	2,040	845	860	1,377	1,314	6	6	1,950	2,340	2,830	2,000	2,410	2,880	1,875	2,265	2,730	1,925	2,335	2,780	3,388	3,701	4,171	3,725	4,038	4,461
	TF450/TS450	4,500	2,125	2,140	945	960	1,477	1,414	6	6	1,930	2,310	2,780	1,960	2,380	2,830	1,855	2,235	2,680	1,885	2,305	2,730	3,610	3,923	4,401	3,747	4,060	4,487
	TF470/TS470	4,700	2,175	2,190	955	1,010	1,527	1,464	6	6	1,890	2,260	2,750	1,930	2,340	2,790	1,815	2,185	2,650	1,855	2,265	2,690	3,624	3,937	4,415	3,761	4,074	4,501
	TF500/TS500	5,000	2,275	2,290	1,055	1,110	1,627	1,564	6	6	1,840	2,210	2,680	1,890	2,280	2,730	1,765	2,135	2,580	1,815	2,205	2,630	3,646	3,959	4,437	3,783	4,096	4,523
	TF550/TS550	5,500	2,475	2,490	1,295	1,310	1,827	1,764	6	6	1,770	1,600	2,580	1,810	2,210	2,630	1,695	1,525	2,480	1,735	2,135	2,530	3,685	3,998	4,481	3,822	4,135	4,567
	TF600/TS600	6,000	2,675	2,690	1,495	1,510	2,027	1,964	6	6	1,400	1,050	1,880	1,750	2,110	2,530	1,325	975	1,780	1,675	2,035	2,430	3,750	4,063	4,551	3,887	4,200	4,637
4-Stage full free lift	QF610	6,115	2,177	2,175	997	955	1,512	1,449	3	3	1,480	1,580	1,780	1,490	1,810	2,270	1,405	1,505	1,680	1,415	1,735	2,170	3,992	4,305	4,731	4,130	4,443	4,807
	QF660	6,615	2,377	2,375	1,197	1,155	1,712	1,649	3	3	1,380	1,480	1,670	1,400	1,720	2,160	1,305	1,405	1,570	1,325	1,645	2,060	4,052	4,365	4,791	4,190	4,503	4,867
	QF700	7,015	2,477	2,475	1,297	1,295	1,812	1,749	3	3	1,180	1,280	1,370	1,110	1,630	2,050	1,105	1,155	1,270	1,235	1,555	1,950	4,082	4,396	4,821	4,221	4,534	4,898
	QF745	7,465	2,627	2,625	1,447	1,445	1,962	1,899	3	3	900	950	1,050	1,210	1,520	1,920	825	875	950	1,135	1,445	1,820	4,128	4,441	4,867	4,327	4,580	4,943
QF790	7,915	2,777	2,775	1,597	1,595	2,112	2,049	3	3	800	850	950	810	1,090	1,520	525	575	650	735	835	990	4,228	4,542	4,967	4,367	4,680	5,044	


※ TS-Mast : Wide Visible 3-Stage Full Free Lift Mast with 2 Free Lift Cylinders.

* Standard

Load Capacity

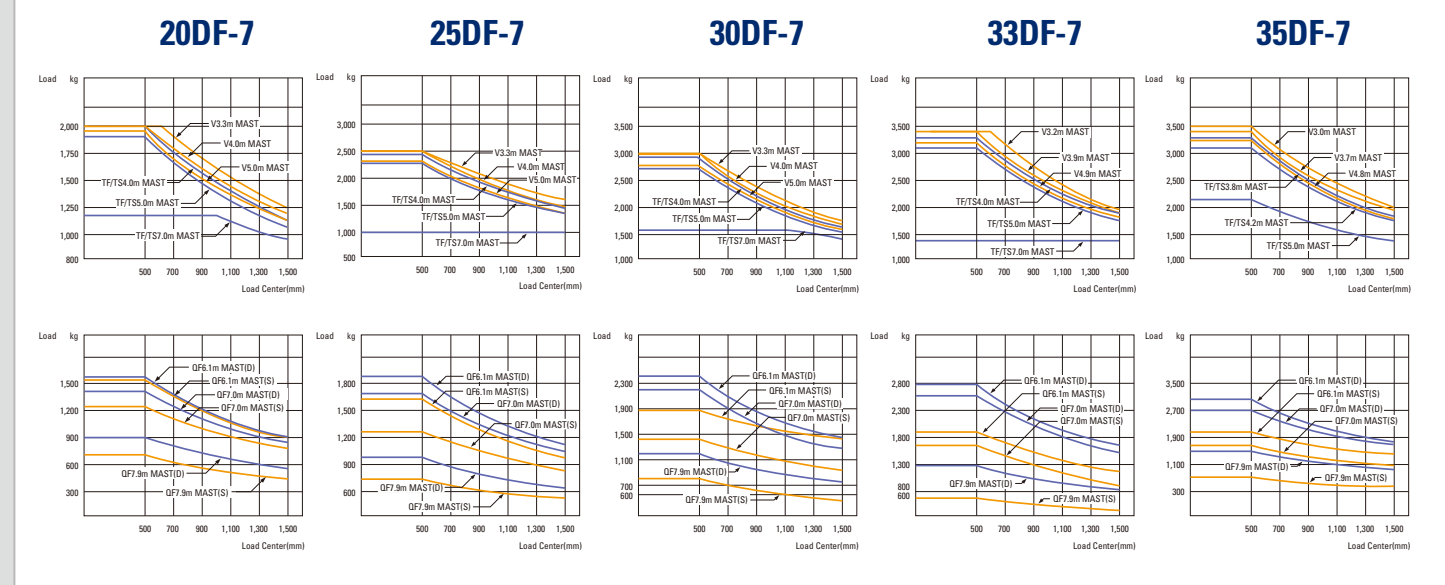

Various Attachments

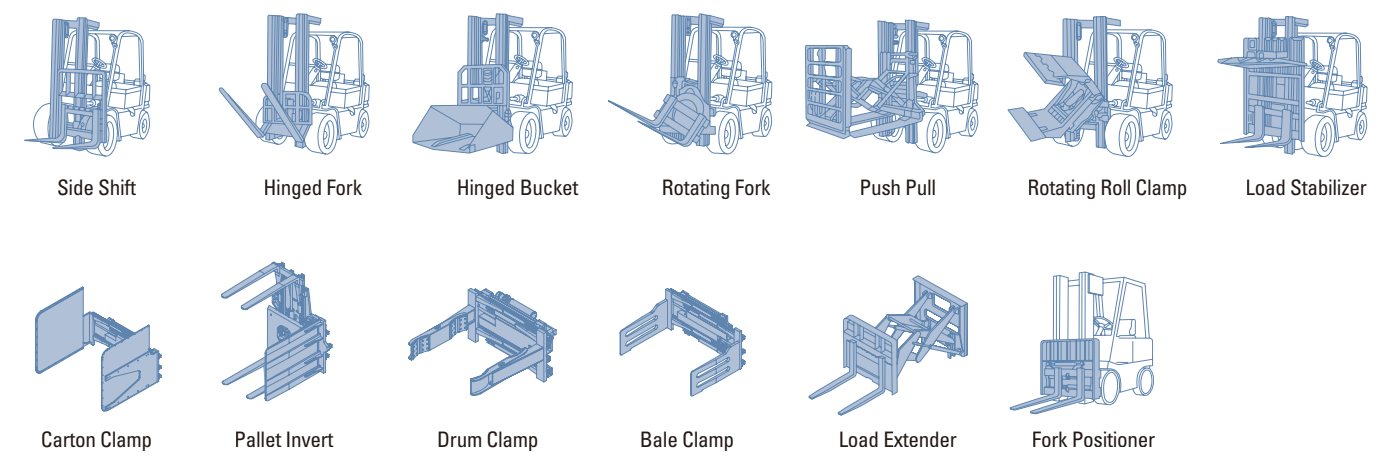

Optional Items

- Fork (LxWxT)(mm)
 - 20DF/25DF-7
 - 900 X 100 X 45
 - 1,000 X 100 X 45
 - 1,200 X 100 X 45
 - 1,350 X 100 X 45
 - 1,500 X 100 X 45
 - 1,650 X 100 X 45
 - 1,800 X 100 X 45
 - 30DF/33DF-7
 - 900 X 122 X 45
 - 1,000 X 122 X 45
 - 1,200 X 122 X 45
 - 1,350 X 122 X 45
 - 1,500 X 122 X 45
 - 1,650 X 122 X 45
 - 1,800 X 122 X 45
 - 2,150 X 122 X 45
 - 35DF-7
 - 900 X 122 X 45
 - 1,150 X 122 X 45
 - 1,200 X 122 X 45
 - 1,350 X 122 X 45
 - 1,500 X 122 X 45
 - 1,650 X 122 X 45
 - 1,800 X 122 X 45
 - 1,970 X 122 X 45
 - 2,120 X 122 X 45
 - 2,400 X 122 X 45
- Overshoe(mm)
 - 1,300 / 1,500 / 1,700 / 1,800
- Tilting (6°/6°, 3°/3°)
- Sideshift
- Integrated Sideshift
- Attach Piping (3-Spool piping / 4-Spool piping)
- Hose - Reel (VF)
- Fuel Cap (Without key)
- Exhaust (Horizontal)
- Seat (Belt, Pocket, Arm rest, Hip rest)
- Tire (Solid, No-Marking, Double)
- Opss (Travel / Travel + Mast)
- MCV (3-Spool / 4-Spool)
- Master S/W
- Beacon Lamp
- Hazard S/W
- Rear Work Lamp
- Cabin & Heater
- Pre Cleaner
- TS-MAST
- QF-MAST

Mast Specification (33DF-7)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height		Tilt Angle		Load capacity w / o side shift at 500 mm LC		Load capacity w / side shift at 500 mm LC		Truck Weight Unload			
			With bkr (mm)	With / o bkr (mm)	Fwd	Bwd	Single Tire (kg)		Double Tire (kg)		Single Tire (kg)		Double Tire (kg)	
			33DF-7	33DF-7			33DF-7	33DF-7	33DF-7	33DF-7	33DF-7	33DF-7	33DF-7	33DF-7
2-Stage limited free lift	V290	2,900	2,040	155	155	6	10	3,300	3,300	3,300	3,300	4,390	4,481	
	*V320	3,200	2,190	155	155	6	10	3,300	3,300	3,300	3,300	4,414	4,505	
	V340	3,400	2,290	155	155	6	10	3,300	3,300	3,300	3,300	4,430	4,521	
	V360	3,600	2,440	155	155	6	10	3,300	3,300	3,300	3,300	4,454	4,545	
	V380	3,800	2,590	155	155	6	10	3,300	3,300	3,300	3,300	4,486	4,577	
	V420	4,200	2,740	155	155	6	6	3,300	3,300	3,275	3,300	4,539	4,630	
	V440	4,400	2,890	155	155	6	6	3,275	3,300	3,200	3,300	4,563	4,654	
	V460	4,600	2,990	155	155	6	6	3,225	3,300	3,150	3,250	4,579	4,670	
	V480	4,800	3,140	155	155	6	6	3,175	3,250	3,100	3,150	4,602	4,693	
	2-Stage full free lift	VF290	2,900	2,090	910	1,269	6	6	3,300	3,300	3,300	3,300	4,429	4,520
VF320		3,200	2,240	1,060	1,419	6	6	3,300	3,300	3,300	3,300	4,464	4,555	
3-Stage full free lift	TF370/TS370	3,700	1,890	710	1,069	6	6	3,300	3,300	3,300	3,300	4,571	4,662	
	TF400/TS400	4,000	1,990	810	1,169	6	6	3,275	3,300	3,200	3,300	4,593	4,684	
	TF430/TS430	4,300	2,090	910	1,269	6	6	3,200	3,300	3,150	3,225	4,614	4,705	
	TF450/TS450	4,500	2,190	1,010	1,369	6	6	3,150	3,250	3,075	3,175	4,636	4,727	
	TF470/TS470	4,700	2,240	1,060	1,419	6	6	3,100	3,200	3,025	3,125	4,649	4,740	
	TF500/TS500	5,000	2,340</											