







شركت آسان راه البرز

با 40 سال تجربه در زمینه ی وار دات ماشین آلات معدنی، راهسازی و صنعتی و با استفاده از مدیران خبره، کار شناسان مجرب و پرسنل با تجربه آموزش دیده از فعالترین شرکت های تجاری در ایران می باشد.

این شرکت در سال 1389 موفق به اخذ نمایندگی رسمی از شرکت هیوندای کره جنوبی و نمایندگی انحصاری محصولات اوردایم برای واردات، فروش و خدمات پس از فروش ماشین آلات سنگین، راهسازی،

معدنی و صنعتی در ایران گردید.

این شرکت با توجه به نیاز مشتریان و محیط های کاری موجود اقدام به وار دات انواع ماشین آلات راهسازی از قبیل لودر چرخ لاستیکی،بیل هیدرولیکی چرخ لاستیکی و چرخ زنجیری و انواع لیفتراک با بازه تناژی

بالا و انواع چکش های هیدرولیکی و انواع ژنراتورهای برق(دیزلی و دوگانه سوز) نموده است و هردوره با توجه به درخواستها بر تنوع محصولات خود اضافه میکند.

ISO9001 ISO14001 www.everdigm.com



CRAWLER DRILL ECD 40 / ECD 40E







ECD40 / ECD 40E



Engine :

EVERDIGM CrawlerDrill is equipped with enviroment friendly Tier 3 Caterpillar engine. It also provides low fuel consumption. In addition, operator is less exposed from engine noise and vibratons due to direct connection of engine, compressor and pump. Other engine is also available by customer request.



Compressor:

Large capacity air compressor with high output helps to obtain an excellent boring effect and decrease bit wear as discharging dust promptly. In addition, the anti jamming system will prevent jam in advance to keep long life time.



Cabin:

Wide working view and safe and comfort operating condition are supported from new design of Cabin. Heating and air conditioning system and radio and CD player are provided as standard to make operators feel comfortable.



Engine room:

Large engine room allows easy access to Electric control box & filters.



Track:

The track designed by excavator type gives increased durability and firm grip on working in slanted ground.



Pre-Cleaner:

The Pre-Cleaner lengthens the life of the filter in the dust collector by primarily intercepting the large fragments toward the dust collector.



Digital Angle Gauge(Option):

EVERDIGM drill equipped with sensor to measure an angle inclination of 2 axles during drilling operation. Operator can check horizontal and vertical position from the monitor of



Dust collector:

With the six built-in fiters, the interval and time of pulse is controllable, and therefore the dust collecting ability has been improved.



Electric Control Box:

Centralized Main Control Panel allows easy maintenance. Through the transparent MCP cover, everyone can check fuse connection simply and easily.





Inside bonnet :

Large inside space allows easy access & maintenance for whole components.



Drifter

ED-150, designed simply but intelligently, delivers high drilling performance with tremendous impact power. Its performance? There is no doubt. Just do experience



4 Stage Pump:

Equipped with the 2 stage piston pump and the 2 stage gear pump, it has been improved the work performance with the sufficient flux. The engine, pump and compressor are connected directly to maximize power transmission.



Upper Bonnet:

Upper Bonnet is fabricated as high quality as same as both side of cover and holes on the upper bonnet allow emitting hot air inside of bonnet.



Lubricating Device :

The large-volume lubricator oil tank is adopted, and you can easily control the volume of oil which flows to the drifter.



Boom :

Equipped with the extension boom of 4 feet (1200mm) as standard, it can enlarge the working radius up to 10 degree to left side and 45 degree to right side.



Cooling System :

Radiator, Intercooler and Oil Cooler are assembled as all in one to make air flow smooth and the all in one system ensures convenient repair and maintenance In addition, the large size fan helps to maximize cooling effect.




Specification


MODEL		ECD40	ECD40E
BIT&ROD	BIT DIAMETER	64mm~102mm (2.5"~4")	
	ROD SIZE	T45, T38	
	ROD LENGTH	3,050mm (10') / 3,660mm (12')	
DIMENSIONS -	WEIGHT	12,800kg (28,219 lbs)	13,500kg (29,762 lbs)
	OVERALL LENGTH	9,165mm (30')	9,305mm (30'5")
	OVERALL WIDTH	2,305mm (7′6″)	
	OVERRALL HEIGHT	2,860mm (9'4")	
DRIFTER	MODEL	ED-150	
	NUMBER OF BLOWS	2,000-2,500 bpm	
	NUMBER OF REVOLUTION	0~200 rpm	
TRAMMING -	GROUND CLEARANCE	555mm (21")	
	OSCILLATION ANGLE	22° (F11° / R11°)	
	TRAVELLING	0 - 3.5 km/hr (0-2.2 mph)	
	GRADEABILITY	30°	
DIESEL ENGINE -	MODEL	CATERPILLAR C7	*CUMMINS 6BTAA5.9C
	RATED OUTPUT	225hp (168kW) / 2,200rpm	175hp (130kW) / 2,200rpm
	EMISSIONS	TIER III	TIER II
	FULL TANK CAPACITY	350ℓ (92gal)	330l (87gal)
COMPRESSOR -	FREE AIR DELIVERY	6 m³/min (211cfm)	
	AIR PRESSURE	10.5 kg/cm² (149psi)	
BOOM -	TYPE	FIXED BOOM	EXTENSION BOOM
	LENGTH	2,300mm (7'6")	4,300mm(3,100mm+1,200mm) [14'1"(10'17"+3'94")]
	SWING ANGLE	L 10° / R 45°	
	LIFT ANGLE	UP 45° / DOWN 25°	
GUIDE SHELL	OVERALL LENGTH	7,430mm (24'4")	
	SLIDE LENGTH	1,500mm (4'9")	
	SWING ANGLE	L 45°~R30° (Guide shell 90°)	
	TILT ANGLE	UP 35° / DOWN 145°	
	FEED LENGTH	6,168mm (20'2")	
DUST COLLECTOR	SUCTION CAPACITY	24 m³/min (847cfm)	
	NUMBER OF FILTERS	6	
	PRE-CLEANER	STANDARD	
HYDRAULIC SYSTEM -	VARIABLE DISCHARGE	AXIAL PISTON PUMP X 2	
	FIXED DISCHARGE	GEAR PUMP X 2	
ROD CHANGER	NUMBER OF RODS	5+1	
CABIN	STANDARD ACCESSORIES	AIR CONDITIONER, HEATER	

^{*}The asterisks are optional.


■ Coverage areas

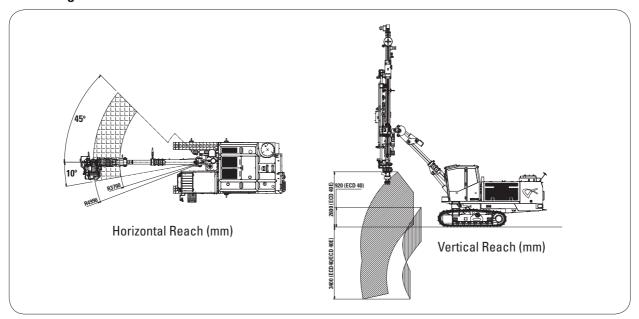

Feed swing angles

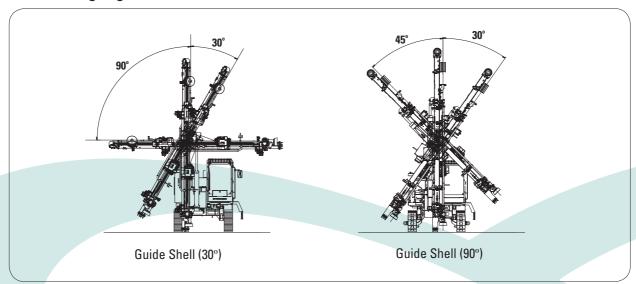

■ Dimension (mm)

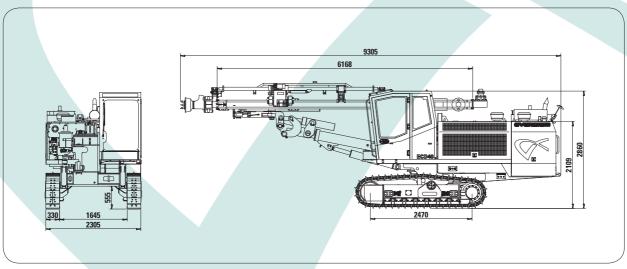

Crawler Drill

www.everdigm.com



*Specifications contained in the catalogue may be changed without prior notice for improvement of quality and performance.

Vol.03 ECDE1210-04 5. Oct. 2012

© EVERDIGM Corp. Printed in Korea

Distributed by

Head Office & Factory

332-3, Janggwan-ri, Jincheon-eub, Chungcheongbuk-do, Korea Tel_+82-43-530-3300 Fax_+82-530-3429

Sales & Marketing Office

#1203, Woolim Lion's Valley 2, 680, Gasan-Dong, Geumcheon-Gu, Seoul, Korea Tel_+82-2-801-0800 Fax_+82-2-801-0899

> www.everdigm.com everdigm@everdigm.com

